

### LED Gimble Downlight



### Features & Benefits

- 3 years warranty
- White finish fitting with independent LED driver and built-in lamp supplied
- Pre-wired with 1.2 meters quick-connect lead and plug
- Capable of smooth dimming from 100% to 15%, compatible with most brands of leading/trailing edge dimmers
- No flicker, mercury or UV emission associated with health hazards
- Incredible longevity up to 35,000 hours of practical lifespan, hence very low maintenance cost
- Very good colour rendering ability, ensuring elegant reproduction of object colours

### Options

- Available in warm white and cool white colour appearance




### Ordering Information

Part No.	Barcode	Power	Colour	CCT	Flux	Fascia	Finish	Cut out	Height	Diameter
RTLD012AZ0201	6922619685987	12W	Warm white	3000K	750lm	Round	White	Φ90mm	46mm	110mm
RTLD012AZ0202	6922619685994	12W	Cool white	4000K	800lm	Round	White	Φ90mm	46mm	110mm


### Specifications

- Power consumptions: 12W
- Input voltage: 220-240V~
- Dimmable: Yes
- Dimming range: 15%-100%
- Luminous flux: 750lm / 800lm
- Colour appearance: warm white/cool white
- Colour temperature: 3000K or 4000K
- Colour rendering index (Ra): 80+
- Beam angle: 60°
- Lumen maintenance (L70 B50): 35,000 hours
- Tilt angle: 0 to 40°
- Circular cut out size: 90mm
- Warranty: 3 years
- Carton quantity: 6 pcs

### Dimensions

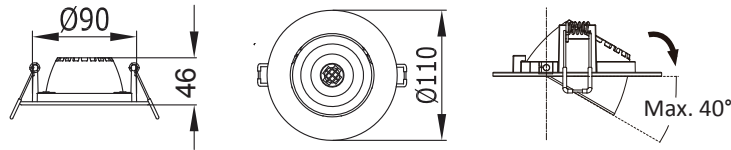

### Photometry

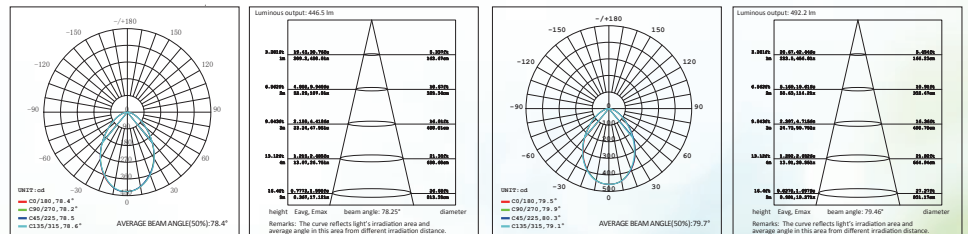

### ReneSola Partner

### Telephone



ReneSola's Global Office Network

Follow us



Melbourne: 18 Corporate Blvd Bayswater, VIC 3153  
 Brisbane: 2/103 Buchanan Road, Banyo, QLD 4014  
 ABN: 58 159 368 859 | ACN: 159 368 859

All rights reserved. Specifications are subject to change without prior notice.