



## LED GLS Globe



### Features & Benefits

- Ideal replacement for incandescent, halogen and compact fluorescent lamps
- No flicker, mercury or UV radiations associated with health hazards
- No warm up time, meaning instant full brightness when switched on
- Incredible longevity up to 15,000 hours of practical lifespan, meaning frequent globe replacement is not required, hence very low maintenance cost
- Very good colour rendering ability, ensuring elegant reproduction of object colours

### Options

- Available in three performance levels ranging 470 lm, 806 lm or 1055 lm
- Available in ES and BC base
- Available in warm white and daylight colour appearances




## Ordering Information

Part No.	Barcode	Power	Colour	CCT	Flux	Cap	Length	Width	Alternative to
RA60007T0101	6922619685802	6.5W	Warm white	2700K	470lm	E27	115mm	60mm	40W GLS
RA60007T0102	6922619685819	6.5W	Warm white	2700K	470lm	B22	113mm	60mm	40W GLS
RA60007T0103	6922619685826	6.5W	Daylight	6500K	470lm	E27	115mm	60mm	40W GLS
RA60007T0104	6922619685833	6.5W	Daylight	6500K	470lm	B22	113mm	60mm	40W GLS
RA60010T0101	6922619685840	9.5W	Warm white	2700K	806lm	E27	115mm	60mm	60W GLS
RA60010T0102	6922619685857	9.5W	Warm white	2700K	806lm	B22	113mm	60mm	60W GLS
RA60010T0103	6922619685864	9.5W	Daylight	6500K	806lm	E27	115mm	60mm	60W GLS
RA60010T0104	6922619685871	9.5W	Daylight	6500K	806lm	B22	113mm	60mm	60W GLS
RA67012T0101	6922619685901	12W	Warm white	2700K	1055lm	E27	136mm	67mm	75W GLS
RA67012T0102	6922619685918	12W	Warm white	2700K	1055lm	B22	134mm	67mm	75W GLS
RA67012T0103	6922619685925	12W	Daylight	6500K	1055lm	E27	136mm	67mm	75W GLS
RA67012T0104	6922619685932	12W	Daylight	6500K	1055lm	B22	134mm	67mm	75W GLS


## Specifications

- Power consumptions: 6.5W, 9.5W or 12W
- Input voltage: 220-240V~
- Dimmable: No
- Luminous flux: 470lm, 806lm or 1055lm
- Colour appearance: warm white or daylight
- Colour temperature: 2700K or 6500K
- Colour rendering index (Ra): 80+
- Beam angle: 200°(A67)/220°
- Lumen maintenance (L70 B50): 15,000 hours
- Cap fitting (base): E27 or B22
- Operating temperature: -20°C to +45°C
- Switch times: 20,000
- Carton quantity: 12 pcs

## Dimensions

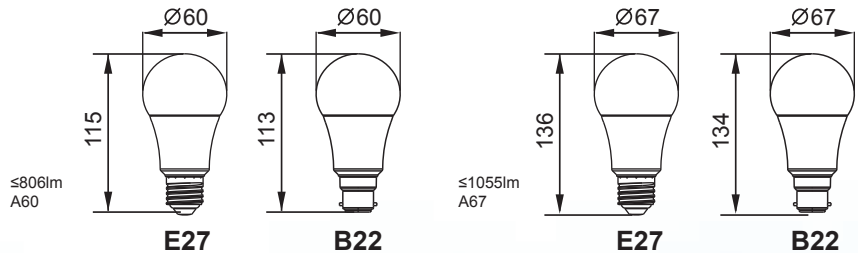

## Photometry

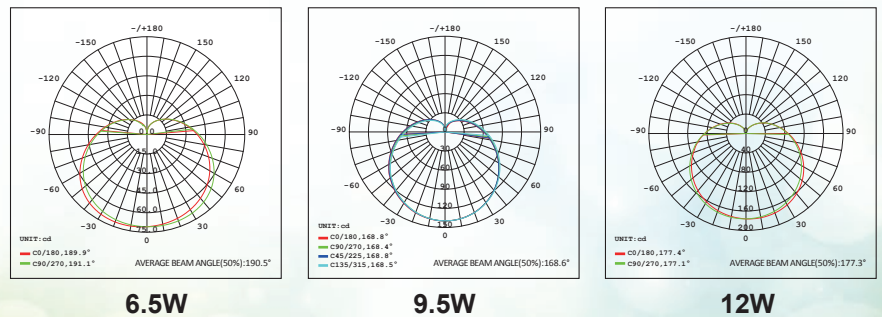

ReneSola Partner

Telephone



ReneSola's Global Office Network

Follow us



Melbourne: 18 Corporate Blvd Bayswater, VIC 3153  
 Brisbane: 2/103 Buchanan Road, Banyo, QLD 4014  
 ABN: 58 159 368 859 | ACN: 159 368 859

All rights reserved. Specifications are subject to change without prior notice.